Applied


Front panel, sleeve and grille not included

Features


- Updated version based on the original Chromalox™ design drawings
- Optimized design for highest energy efficiency
- Premium components for reliability and durability
- Acoustic noise cancelling materials for unmatched comfort
- Commercial-duty construction with heavy guage galvanized steel
- Permanent type washable filter
- Heating-cooling functions controlled by 24V wall thermostat
 - Floor level air supply transition cabinet provides efficient heating and cooling to multiple rooms
 - Two-stage heat standard on units 4.5 kW and above
 - Many cooling & heating options to match circuit amperage
 - Separate indoor and outdoor fan motor
 - Rotary compressor

DIRECT REPLACEMENT FOR

 Chromalox™ Space Command SC-U-DF SC-U-DF - 07000 to 15075 40770-3 -100 to 119, 200 to 219





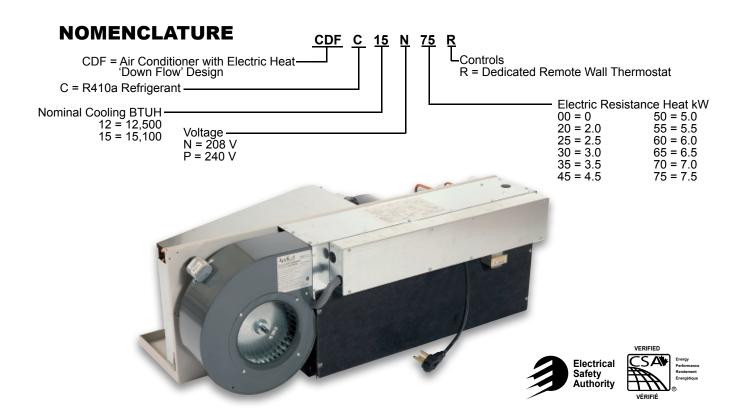

CDF (Air Conditioner with Electric Heat)

Cooling/Heating Performance

			Cooling				Resistance Heat					
Model	Voltage	Cord	втин	EER	Amps	Pts./hr.	втин	kW	Amps	Fuse Amps	Indoor CFM	Net WT. lbs.
CDFC12N25R	208	30A	12500	9.3	6.3	3.8	8800	2.5	12.7	20	290	155
CDFC12N45R	208	30A	12500	9.3	6.3	3.8	15600	4.5	27.7	30	290	155
CDFC15N45R	208	30A	15100	8.9	8	4.8	15600	4.5	27.7	30	290	155
CDFC15N65R	208	50A	15100	8.9	8	4.8	20800	6.0	36.7	40	290	155
CDFC15N75R	208	50A	15100	8.9	8	4.8	25900	7.5	45.7	50	290	155
CDFC12P20R	240	30A	12700	9.1	6	3.8	7100	2.0	8.9	15	290	155
CDFC12P35R	240	30A	12700	9.1	6	3.8	12200	3.5	15.2	20	290	155
CDFC15P55R	240	30A	15400	8.7	8	4.8	19100	5.5	23.5	30	290	155
CDFC15P75R	240	50A	15400	8.7	8	4.8	25900	7.5	31.8	40	290	155

Other heater sizes and cooling only models are available. Contact us for further information.



1-888-MID-CITY (643-2489)