

FITS
16" x 42"
WALL SLEEVE

Packaged Terminal Air Conditioners

JK
Downflow

AppliedTM
COMFORT



RELIABILITY / DURABILITY

Sleeve and grille not included



Features

- Premium components for reliability and durability
- Acoustic noise cancelling materials for unmatched comfort
- Commercial-duty construction with heavy guage galvanized steel
- New front panel included
- Permanent type washable filter
- Heating-cooling functions controlled by 24V wall thermostat (R) or standard unit-mounted rotary control (S)
- Floor level air supply transition cabinet provides efficient heating and cooling to multiple rooms
- Many cooling & heating options to match circuit amperage
- Separate indoor and outdoor fan motor
- Rotary compressor

DIRECT REPLACEMENT FOR

- Slant/Fin® JK Downflow



Manufacturer's Warranty:


Year 1: Parts and labour

Year 2-6: Sealed system parts only including compressor

Shipping of parts is covered to any location in North America

OPTIONAL EXTENDED WARRANTY is available at additional cost per chassis

NOMENCLATURE

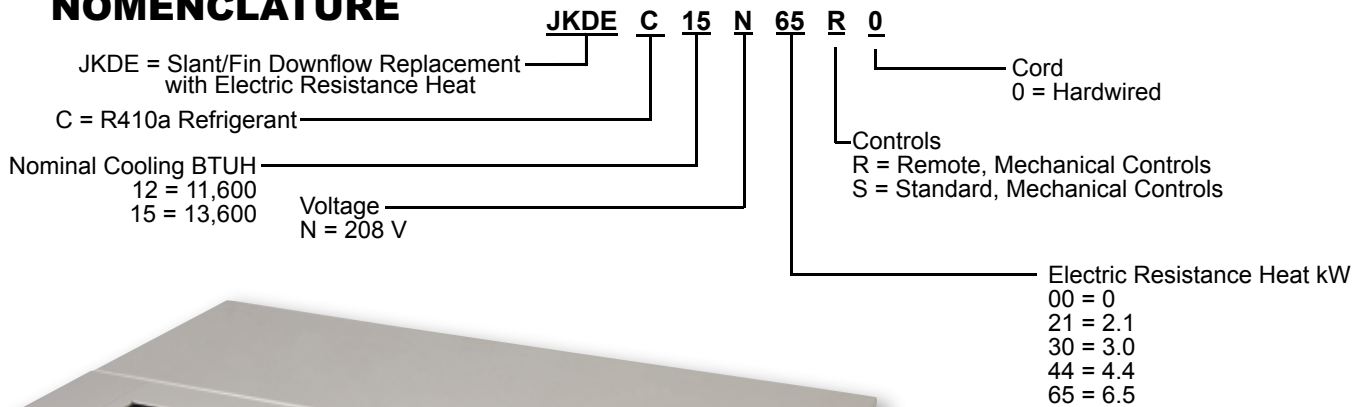

JKD (Air Conditioner with Electric Heat) Cooling/Heating Performance

Model	Voltage	Cooling				Resistance Heat			Fuse Amps	Indoor CFM	Net WT. lbs.
		BTUH	EER	Amps	Pts./hr.	BTUH	kW	Amps			
JKDEC12N21	208	11600	8.7	6.7	3.8	7300	2.1	10.7	15	320	160
JKDEC12N30	208	11600	8.7	6.7	3.8	10400	3.0	15	20	320	160
JKDEC12N44	208	11600	8.7	6.7	3.8	15100	4.4	21.8	30	320	160
JKDEC12N65	208	11600	8.7	6.7	3.8	22300	6.5	31.9	40	290	160
JKDEC15N21	208	13600	8	8.5	4.0	7300	2.1	10.7	15	320	160
JKDEC15N30	208	13600	8	8.5	4.0	10400	3.0	15	20	320	160
JKDEC15N44	208	13600	8	8.5	4.0	15100	4.4	21.8	30	320	160
JKDEC15N65	208	13600	8	8.5	4.0	22300	6.5	31.9	40	320	160

Other heater sizes and cooling only models are available. Contact us for further information.