

FITS
16³/₈" x 44⁷/₈"
WALL SLEEVE

Packaged Terminal Air Conditioners

EA

AppliedTM
COMFORT



RELIABILITY / DURABILITY

Sleeve, grille and accessories sold separately



Features

- Very Quiet ~ Acoustic noise cancelling materials and optimized fan designs for unmatched comfort
- Easy Installation ~ Exact replacement, no sleeve or louver modifications, works with EA front panel
- Highest Efficiency Exact Replacement for EA's
- Superior High Static Pressure Blower Design ~ Best on the market for ducted applications
- Modern Electronic Touchpad ~ Switchable to 24V remote wall thermostat
Mechanical controls also available (no remote capability)

DIRECT REPLACEMENT FOR

- EA (McQuay, Singer, Remington)
- PDAE (McQuay)
- ED (Islandaire)

Accessories

ACCEA_FTCOVER_PREMIUM



12" x 18¹/₄"
#ACCEAFILTER

Manufacturer's Warranty:



Year 1: Parts and labour

Year 2-6: Sealed system parts only including compressor

Shipping of parts is covered to any location in North America

OPTIONAL EXTENDED WARRANTY is available at additional cost per chassis

NOMENCLATURE

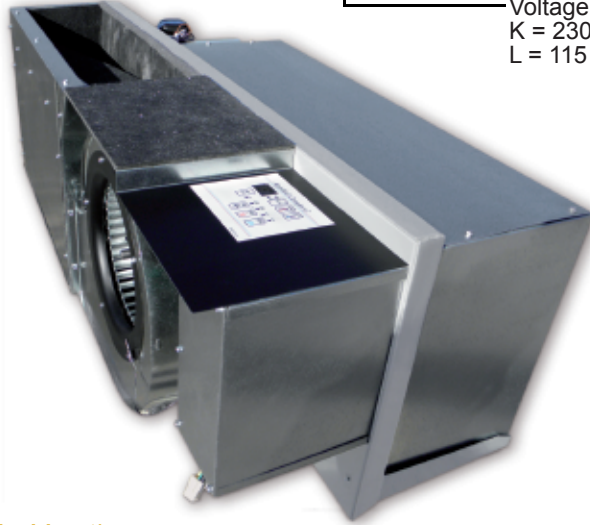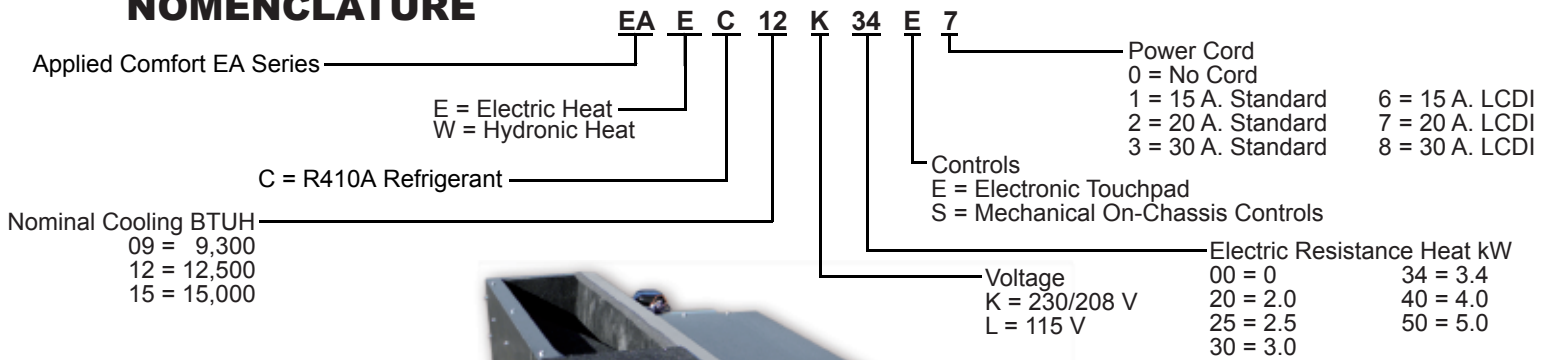

EA (Air Conditioner with Electric Heat) Cooling/Heating Performance

Model	Voltage	Cord	Cooling				Resistance Heat			Indoor CFM		Net WT. lbs.
			BTUH	EER	Amps	Pts./hr.	BTUH	kW	Amps	LOW	HIGH	
EAEC09L00	115	20A	9300	10.1	7.5	2.0	N/A	N/A	N/A	240	300	134
EAEC12L00	115	20A	12500	10.1	10.8	3.2	N/A	N/A	N/A	250	330	134
EAEC09K00	230/208	15A	9300	10.1	4.2	2.0	N/A	N/A	N/A	240	300	134
EAEC09K25	230/208	15A	9300	10.1	4.2	2.0	8900/7500	3.5/2.1	11.6/10.5	240	300	134
EAEC09K34	230/208	20A	9300	10.1	4.2	2.0	12000/9300	3.4/2.8	15.5/14.1	240	300	134
EAEC09K50	230/208	30A	9300	10.1	4.2	2.0	17500/13300	5.0/4.1	22.5/20.4	240	300	134
EAEC12K00	230/208	15A	12500	10.1	5.9	3.2	N/A	N/A	N/A	250	330	134
EAEC12K25	230/208	15A	12500	10.1	5.9	3.2	8900/7500	2.5/2.1	11.6/10.5	250	330	134
EAEC12K34	230/208	20A	12500	10.1	5.9	3.2	12000/9300	3.4/2.8	15.5/14.1	250	330	134
EAEC12K50	230/208	30A	12500	10.1	5.9	3.2	17500/13300	5.0/4.1	22.5/20.4	250	330	134
EAEC15K00	230/208	15A	15000	9.7	7.5	4.8	N/A	N/A	N/A	250	330	134
EAEC15K25	230/208	15A	15000	9.7	7.5	4.8	8900/7500	2.5/2.1	11.6/10.5	250	330	134
EAEC15K34	230/208	20A	15000	9.7	7.5	4.8	12000/9300	3.4/2.8	15.5/14.1	250	330	134
EAEC15K50	230/208	30A	15000	9.7	7.5	4.8	17500/13300	5.0/4.1	22.5/20.4	250	330	134